








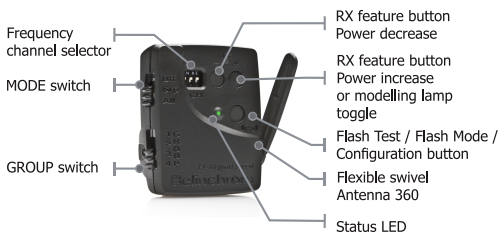


Quick Guide


D-LITE RX ONE
D-LITE RX 2/4
BRX 250/500

Function		Programming
Power	 	Down / Up
Ready charge beep		On / Off
Test		Manual trigger
Photocell		On / Off
Eye cell pre-flash sensor	 Press 4s	On
Modelling lamp		Free/Prop
Master reset	Press together   and turn on the unit	





EI-Skyport Transmitter Speed




























Frequency Channel



The **NORMAL** and **SPEED SYNC** Mode is also available with D-Lite it 2 / 4 and BXRi 250/500.

Speed Sync Function Setup Synchronises D-SLR cameras up to 1/250 s	Toggle mode Press 5s 	Status LED flashes two times. 	on the flash unit display Speed mode 
	Normal Sync Function Setup Synchronises D-SLR cameras up to 1/160 s		flashes one time. 
Master reset	Press 10s		

Setting

Setting	Enter into menu	Toggle sub-menu	Programming
Visual flash control Set Modelling Lamp to turn off during recharge	Press 2s 		Set with   F.1 On F.0 Off
Proportional modelling lamp set up Set Modelling Lamp to 50% on 250ws Head for proportionality with 500ws Head			Set with   -1 On -0 Off
Charge ready beep set-up Set ready beep between 70-490 ms	Press 2s 		Set with   A.1 v ^ Between 70-490 ms A.7
Red eye pre-flash recognition	Press 4s 		Set with   c.0 Auto count the flash c.1 No pre-flash v ^ c.7 6 pre-flash
EL-Skyport activation			Set with   r.0 Off r.1 Normal mode r.2 Speed mode
EL-Skyport group settings	Press together  		Set with   G.1 v ^ Group 1 to 4 G.4
EL-Skyport frequency channel settings			Set with   F.1 v ^ Channel 1 to 8 F.8
Power & modelling steps set-up Set power change to steps 1/10, 5/10 or up to 1/1 f-stop			Set with   L.0 1 stop L.1 1/10 v ^ L.5 5/10
Master reset	Switch off the unit than press together   and turn on again		

Changes are saved automatically after 4s